




**SPECIFICATIONS**

Connections	10" x 8" (250 mm x 200 mm) ANSI Flanges
Max Pump Speed	2,000 rpm
Max Flow	4,750 gpm (1,080 m <sup>3</sup> /h)
Max Head	340' (104 m)
Max Static Priming Lift	28' (8.5 m)
Temperature Limit	160° F (70° C)
Solids Handling Capability	1.5" (38.1 mm)
Max Casing Pressure	200 psig (1,379 kPa)
Fuel Cell	150 gallons (565 liters)
Dry Weight	? lbs

**PUMP MATERIAL**

Casing	Cast Steel (CD4MCu is an option)
Impeller	CD4MCu
Bearing Housing	Cast Iron
Bearing Lubrication	Grease
Shaft	Stainless Steel
Seal	Silicon Carbide on Silicon Carbide
Chassis/Fuel Cell	Steel
Non-Return Valve	Nitrile Fitted Cast Iron

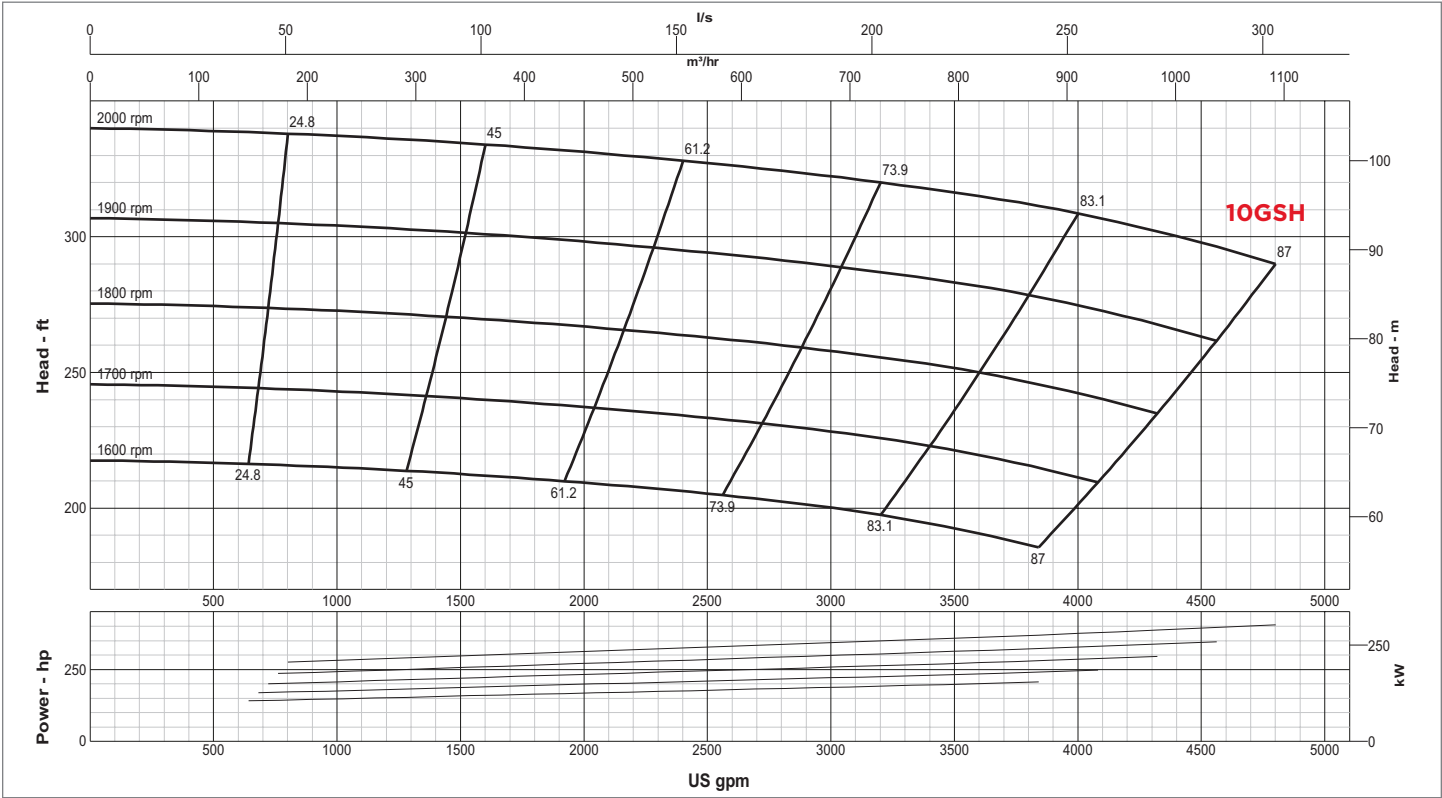

**GLOBAL PUMP**  
 10162 East Coldwater Road, Davison, MI 48423  
 Tel: 810.653.4828 Fax: 810.658.0632  
**1.866.360.PUMP** [www.globalpump.com](http://www.globalpump.com)